

DAIFUKU

Product Profile

SAMTM

System Automation Manager

Automatic Guided Vehicle
Management and
Control System

SAM is a robust, easily-configured control system for Automatic Guided Vehicles (AGVs) and SmartCart[®] Automatic Guided Carts (AGCs). Daifuku, with its subsidiary Daifuku Airport America, is one of the largest AGV manufacturers in the world. SAM is the result of more than 60 years of experience engineering, manufacturing and installing more than 20,000 vehicles. We developed SAM's framework so it can be easily customized to meet our customers' individual needs and improve the efficiency of our AGV and AGC systems.

Benefits Include:

Centralized Vehicle Management

A single controller manages movement of all vehicles providing traffic management, dynamic routing, transport, and assembly management.



Graphical User Interface (GUI)

All vehicles displayed on one screen allowing users to visually see when vehicles need attention.

Easy Integration

Interfaces with major PLCs, Warehouse Management Systems (WMS), and HMI displays.

Comprehensive Reports

Reports include historical data, vehicle status, alarms, activity logging, faults and customized production.



Smart Handling AGV Solutions

Centralized Vehicle Management

SAM talks to each vehicle every second via wireless Ethernet (Wi-Fi). Communication to the host (PLC or WMS) system is constantly maintained via a hardwire connection.

Traffic Management

SAM monitors the locations and destinations of all vehicles. It makes decisions at intersections to prevent collisions and improve system efficiency. Other plant automation can interface with SAM to affect vehicle movement. Also, SAM monitors a vehicle's battery level and directs it to battery charging or exchange station when needed.

Dynamic Routing


SAM determines a vehicle's route by taking into consideration vehicle congestion and faulted vehicles.

Transport Management

As an option, SAM can be configured to include a transport manager that creates jobs and puts them in a job queue. Job requests are entered at a terminal, sent from the host, or automatically generated by SAM. As vehicles become idle, SAM dispatches them to jobs in the queue. If there are no jobs, it directs vehicles towards work activity to reduce travel time when a job is assigned. Jobs are assigned in a FIFO order or based on a selection order defined at each dispatching station.

Assembly Management

SAM offers an assembly manager that includes two configurations - index & dwell, and continuous moving line. Each option uses Takt timers and an interface with workcell PLCs to coordinate releasing of vehicles.

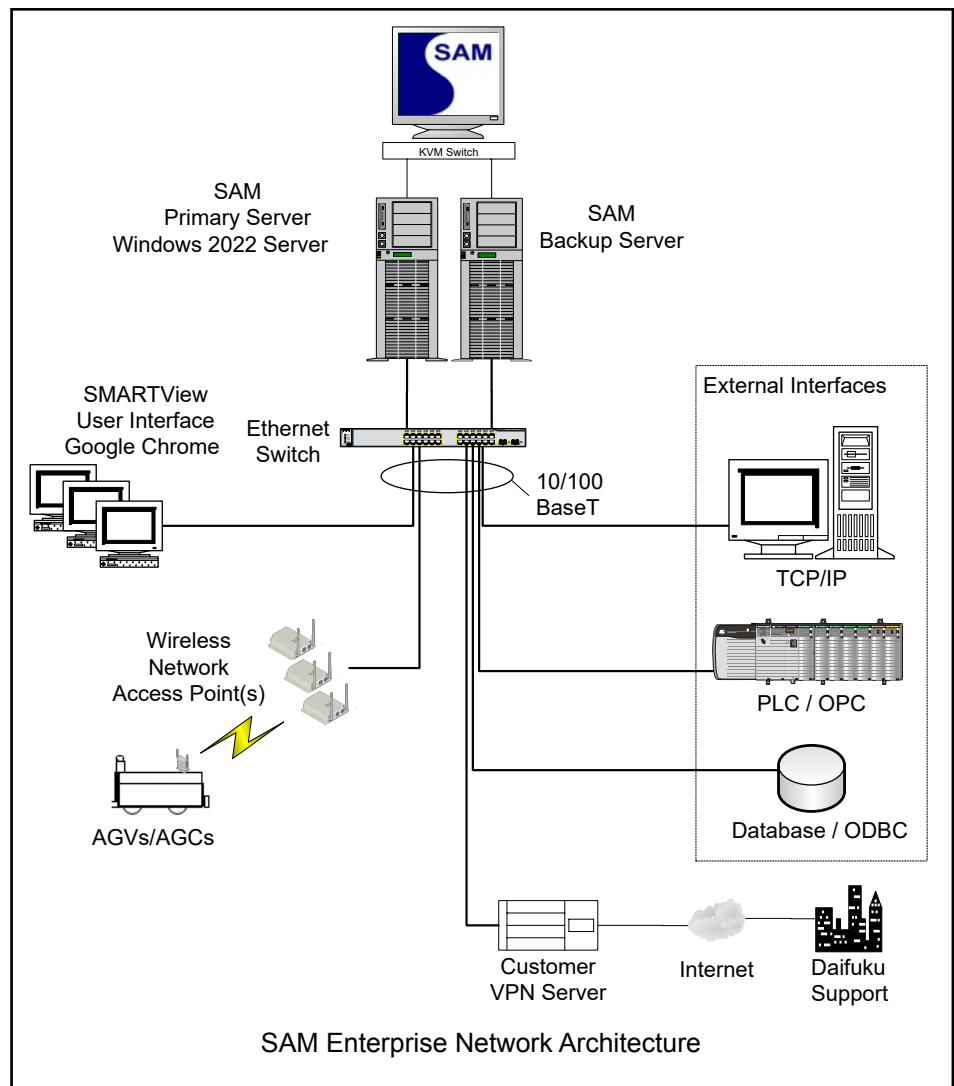

Remote Dispatching Feature Set

Provides a simple link to push-buttons to execute the following simple functions:

Vehicle Call, Send Vehicle, Release Vehicle, Smart Interlock

Automated Transports

Tie a signal to generate a managed transport of a load from predefined locations.

Easy Integration

SAM software is designed for use in integrated systems. The Kepware® OPC PLC interface can be integrated with any OPC platform. The SAM system also interfaces with major PLCs including: Mitsubishi, Siemens, Allen

Bradley, and Omron. SAM software comes with a standardized TCP/IP interface that allows Warehouse Management Systems (WMS) to issue transport requests to the SAM system. SAM software keeps track of all requests, executes them and reports status through the process until completion.



Comprehensive Reports

SAM maintains production information including:

- Vehicle status information
- Vehicle events
- Transport information
- Transport events
- Operator activity
- Customized production reports

SAM features a Microsoft® SQL server database for historical logs of production information. This provides SAM with a data repository to log all system and vehicle events. SAM also keeps historical alarm data tables.

The collage displays several key features of the SmartView interface:

- Alarm History Report:** A table showing alarm events with columns for Set Date/Time, Clear Date/Time, Equip ID, Location, Alarm ID, and Alarm Text. Example data includes alarms for 'TRAIN-AGC-SAM1' on 7/22/2021.
- Vehicle Activity Report:** A table showing vehicle activity with columns for Date/Time, VID, Location, Dest, Job ID, Activity, Battery Level, and Description. Example data shows activity for vehicle 10071.
- Vehicle Condition by Location:** A summary table for vehicle 14001-FRONT BUMPER TRIPPED, showing counts for various conditions across different locations.
- Vehicle Fleet Utilization Details Report:** A table showing fleet utilization with columns for Utilized, State, Action, Duration, and Percent. Example data includes 'Available' (10.43%), 'Blocked' (1.17%), 'Changing' (0.03%), 'Parked' (7.63%), and 'Idle' (54.05%).
- Vehicle Operational State Report:** A table showing operational state with columns for Vehicle ID, % Blocked, % Charging, % Disabled, % Idle, % No Comm, and % Stopped. Example data includes vehicle AGC-01 (12.34%, 2.51%, 0.00%, 8.20%, 75.96%, 0.00%).
- Power Control Sleep Schedule:** A section for managing sleep parameters, including 'Sleep when shift not active' and 'Time after shift to sleep'.
- Vehicle List:** A table showing a list of vehicles with columns for ID, Active, Last Update, Loc, Dest, Release, and Rout. Example data includes vehicle 1 (Enabled, 11:26:30, 41, 800, Released, 51).
- SmartView Dashboard:** A main dashboard showing 'ALARMS - 9' and 'Disabled Vehicles - 1' with navigation links for Reports, Graphics, Vehicles, Transports, Bus Routes, Remote I/O, and Reports.

Graphical User Interface (GUI)

SAM includes a GUI called SmartView® that can be licensed to up to 15 users to interact with the SAM system. SmartView runs on Google Chrome browser.

SmartView shows vehicles at their reported locations on the displayed path. The color of the vehicle changes when the vehicle's status changes.

The screenshot shows the SmartView GUI with a map view and a 'Vehicle 1 Details' panel. The map displays a network of paths with vehicle icons. The 'Vehicle 1 Details' panel provides comprehensive information about the selected vehicle:

- Status:** Vehicle 1 is Enabled
- Automatic:** SAM ERROR RECOVERY OPERATIONS
- Alarm:** (None listed)
- Notes:** (None listed)
- Last Update:** 07/22/2021 11:25:12
- Arrival Time:** 07/22/2021 11:25:11
- Last 4 Locations:** 112 32 505 121
- Current Location:** 113
- Destination:** R04
- Released:** Not Released
- Operation:** No Operation
- CYS:** 0 - Normal
- Load Status:** Empty
- Requested to Stop:** No
- Bus Route:** N/A
- Error Code:** 0
- Condition Code:** 14013 - HOLD STOP
- Sleep Status:** 0101100110001100
- Transponder Code:** 6x660032197
- PLC Inputs:** 0000000000000000
- Inhibit Status:** SAM ERROR RECOVERY OPERATIONS
- Inhibit Vehicle:** 0
- Inhibit Block ID:** 0
- Inhibit System:** 0

Technical Considerations

SAM Enterprise runs on the hardware platform in the chart below.

Also available to install as a virtual machine using Hyper V and VMware.

| FEATURES | SAM ENTERPRISE |
|--|------------------|
| Operating System | W 2022 Server |
| SQL Server 2022 | Standard Edition |
| OPC Interface to PLC | Yes |
| Interface to WMS or Other Automation | Yes |
| Data Logging | Yes |
| System Reports | Standard Set |
| Custom Reports | Optional |
| Communicates with AGV & AGC on Single System | Yes |
| SmartView License | Yes |
| AGV/AGC Licenses Included in Base System | 10 |
| Industrial Hardware | Yes |
| Redundant Hard Drives | Yes |
| Hot Swappable Hard Drives | Yes |
| Dual Power Supply | Yes |
| Hot Backup Available | Yes |



DAIFUKU

30100 Cabot Drive • Novi, MI 48377 USA
 248-553-1000 phone • 248-553-1228 fax
 info@Daifukuna.com • www.Daifuku.com

SAM™, SmartCart® and SmartView® are trademarks of Daifuku Airport America. All other trademarks are the property of their respective owners.

NOTICE: The information, data and specifications in this brochure are subject to change without notice and should not be used for construction purposes. Daifuku Airport America does not represent or warrant that selection of components or accessories set forth in this brochure will necessarily result in proper installation, operation and/or maintenance of such equipment or system, and we disclaim responsibility for any and all damages and injuries resulting from selection, design, installation, operation or maintenance performed by non-Daifuku personnel.